


1 Two Working Tables

Dual platform use, more convenient.

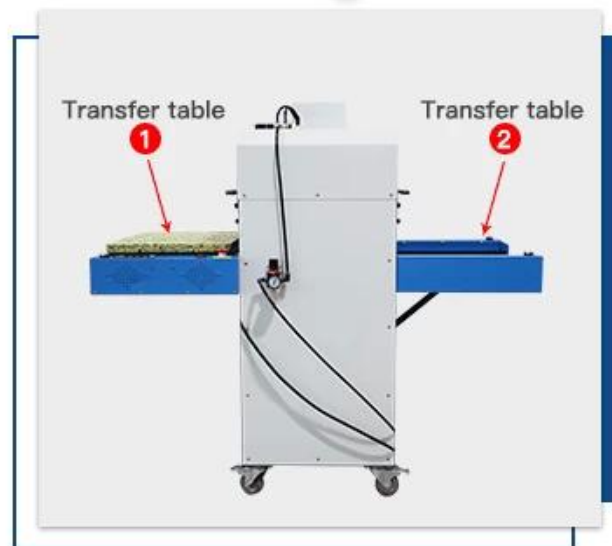

2 Gravity Die Casting Heating Plate

High quality heat element, which makes the heat distribution more even and stable.

3 GY-06 Digital Controller

Accurate temperature display & control, auto time counting, per-alarm, and temperature collation.





4 Pneumatic Mode

Pneumatic Auto Model, High Pressure.

5 Safe Emergency Button

When the machine is operating, you can press this button to protect the user's personal safety in an emergency.



Specification

Model	ASTM-24
Dimensions	16"x24" (40x60cm)
Weight	5.5 lbs
Material	GY-06 Aluminum
Pressure	0-999 PSI
Temperature	225°C
Power	1600W/1800W
Flow	0-999 L/min
Pressure	0-999 PSI
Temperature	225°C
Dimensions	148x93x148mm
Weight	278g

Application



Package

Microtec

— SAFTY PACKING & SHIPPING —



Cardboard Box Packing: Standard export boxes with internal cushioning of pearl cotton to ensure safe transportation of goods. Warning signs for proper box placement and waterproof bags inside.



Wooden Crate Packing: For large machine, machine's feet are locked onto the crate to prevent movement during transportation, and the crate has forklift slots for easy customer transportation. The material is plywood, which avoids fumigation and reduces transportation costs.



Lead Your Path to Heat Transfer Excellence





22 Year's Heat Press
Manufacture



28000m² Factory
280+ Staffs



CE/SGS/RoHS/UL
Certificate



2 Years Warranty
Lifetime Online
Support



100% Quality Control
Inspection



Constant R & D
Leading the Industry



Customized Service
Available



100+ Export
Countries

ADVANCED EQUIPMENTS

Robotic Arms & Laser Cutting Machines

Standardized Production Line

Higher Production Efficiency

Safer Working Environment

Highly Improved Machine Quality

