Description

ASTM-24 □□□□□□□□□□□□ 16""x24"" (40x60cm) □□□□□□□□□□□□

1 Two Working Tables

Dual platform use, more convenient.

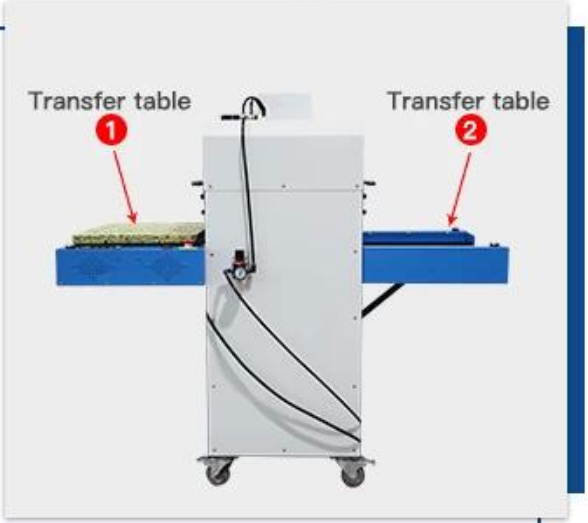

2 Gravity Die Casting Heating Plate

High quality heat element, which makes the heat distribution more even and stable.

3 GY-06 Digital Controller

Accurate temperature display & control, auto time counting, per-alarm, and temperature colla-tion.

4 Penumatic Mode

Pneumatic Auto Model, High Pressure.

5 Safe Emergency Button

When the machine is operating, you can press this button to protect the user's personal safety in an emergency.

Specification

□□□	ASTM-24
□□□□□	□□□□□□
□□□□	16 □□ x 24 □□□40 x 60 □□□
□□	□□
□□□	GY-06 □□□□□□□□□□
□□□□□□	□□□□ 50 □□
□□□□□□□	□□
□□	120V/220V
□□	1600W/1800W
□□□□	0-999 □
□□□□	225℃
□□□□□	±0.5%
□□□□	148x93x148□□
□□□	278□□□□□□□

Gallery

ASTM-24 □□□□□□□□□□□□□□□□□□□□□□T □□□□□koozies□□□□□□□□□□□ DTG□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□