Description

□□□□□□□□□□Microtec □ PSTM □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□PSTM □□□□□□□□□□□□□□ □□80x100cm (32"x40")□100x120cm (40"x48") □ 120x170 □□□48 □□x 68 □□□□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□

PSTM □□□□□□□□□□□□□□□ ASTM □□□□□□□□□□□□□□□ **PSTM** □□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

PSTM □□ □□□□□□□□ XSTM □□□□□□□□□PSTM □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□ PSTM-S □□□□□PSTM □□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□□□□ CE □□□□□□□□□□□□□□□□□□□□□□□□□□ UL □□□□□□□□□□□□□□□□□□□□□□□□□□□□

Feature

Microtec PSTM □□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□ □□□□□□□□□□□□□ - 80x100cm (32"x40")□100x120cm (40"x48") □ 120x170cm (48"x68") - □□□□□□ □□□

□□□□□□□□□ □□□

□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

ASTM □□□□□ □ ASTM □□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□ □□CE□□□□□□□□□□□□□□□□□□□□□□□

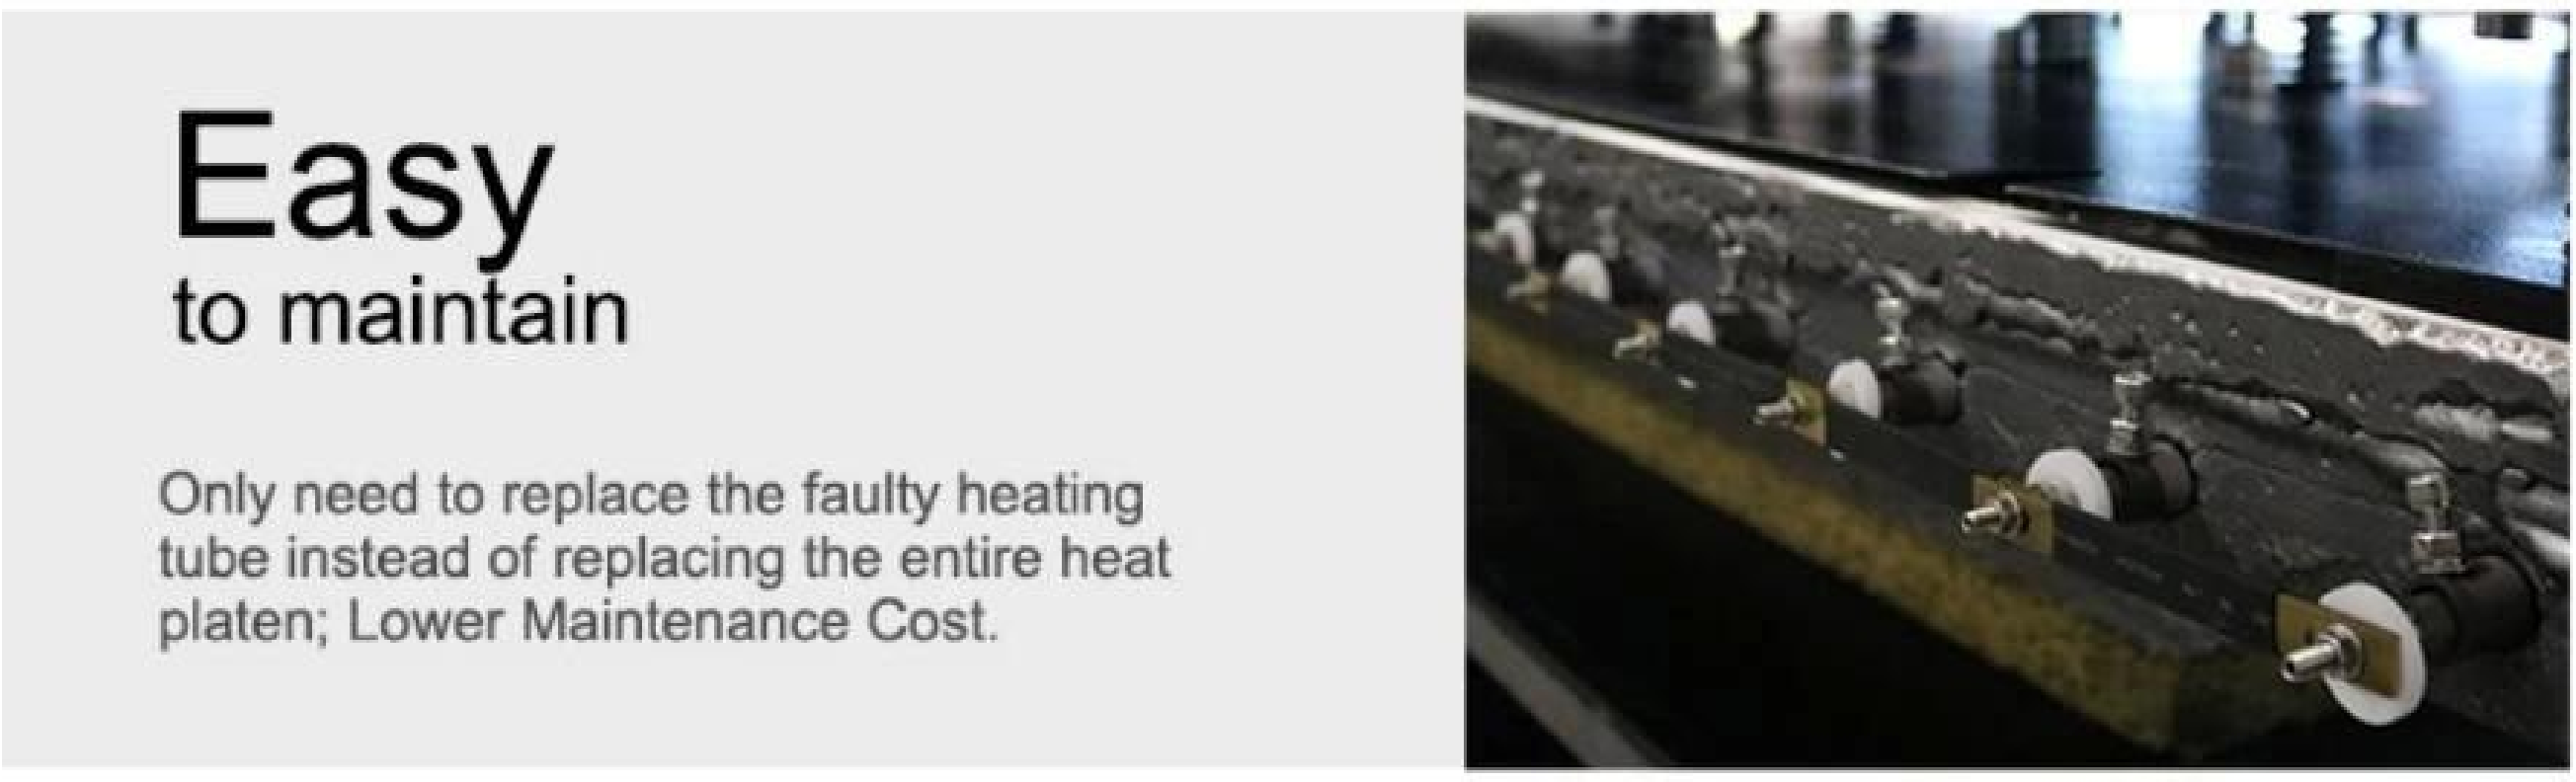

GY-06[illegible]

[illegible]



[illegible]

[illegible]

[illegible]

Specification

[illegible]	PSTM-40/ PSTM-48/ PSTM-68
[illegible]	[illegible] [illegible]
[illegible]	32"x40"/40"x48"/48"x68" (80x100cm/100x120cm/120x170cm)
[illegible]	GY-06 [illegible]
[illegible]	[illegible] 20 [illegible]
[illegible]	[illegible]
[illegible]	220V 1[illegible]/ 220V 3[illegible]/ 380V 3[illegible]
[illegible]	5.1KW/7.5KW/9KW
[illegible]	0-999 [illegible]
[illegible]	225℃
[illegible]	±0.5%
[illegible]	8[illegible]/[illegible]
[illegible]	182x138x176/ 204x157x177/ 241x156x176[illegible]
[illegible]	425[illegible]/ 536[illegible]/ 641[illegible]
[illegible]	604kg/ 764kg/ 900kg ([illegible])
[illegible]	[illegible]2 [illegible] (3HP)

Application

PSTM[illegible]

Package

□□ Microtec □□□□□□□□ □□□□□□□□□□□□□□□□□□□□□

SAFTY PACKING & SHIPPING

Cardboard Box Packing: Standard export boxes with internal cushioning of pearl cotton to ensure safe transportation of goods. Warning signs for proper box placement and waterproof bags inside.

Wooden Crate Packing: For large machine, machine's feet are locked onto the crate to prevent movement during transportation, and the crate has forklift slots for easy customer transportation. The material is plywood, which avoids fumigation and reduces transportation costs.

国
扬

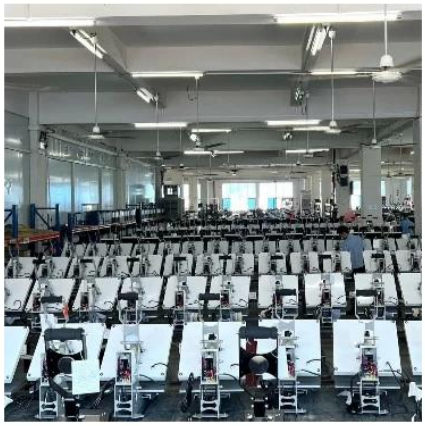

DEDY
Y2