

Microtec KNA 98 KNA

≤30


KNA 98

[1]

[2]

[3]

Microporous structure make higher transfer rate and instant dry

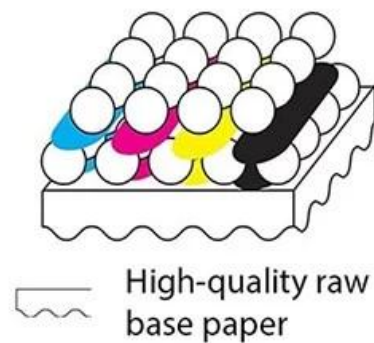

Polyester-coated hard substrates
Polyester-coated textiles



□□

□□	KNA-125
□□□□	125□
□□□□	A4□A3
□□□□	≥98□
□□□□	120□
□	□□a-sub
□□	100□□/□
□□	30□/□□□A4□□□

Printing Instructions

NOTE: For best results we recommend to use a transfer temperature of 205°C. Using this temperature will enhance the transfer quality.e.g.color densities and line sharpness.

Suggested Transfer Instruction

SUBSTRATES	TEMPERATURE	TIME	PRESSURE
Metal Plates	401F (205°C)	150±30 sec	Medium
Fiberglas	401F (205°C)	60±15 sec	Medium
Ceramic mugs	401F (205°C)	3±1 min	Heavy
Ceramic Tiles	401F (205°C)	6±1 min	Light-Medium
Plaques	401F (205°C)	60±15 sec	Medium
Hard boards	401F (205°C)	100±15 sec	Medium
Glass	401F (205°C)	5±1 min	Medium-Heavy
Mouse pads	401F (205°C)	60±15 sec	Medium
Textile applications	401F (205°C)	25-40sec	Medium

Please contact your substrate supplier for additional information



印刷温度≤30℃印刷時間“ S Day”s Day Halloween Halloween Halloween Christal Valentine” S Day DIY

Widely used in life

APPLY FOR COATED
HARD SUBSTRATES



APPLY FOR WHITE OR
LIGHT COLORED FABRIC



WIDE APPLICATION

