




MTX-44



MTX-68

MTX-44(68)

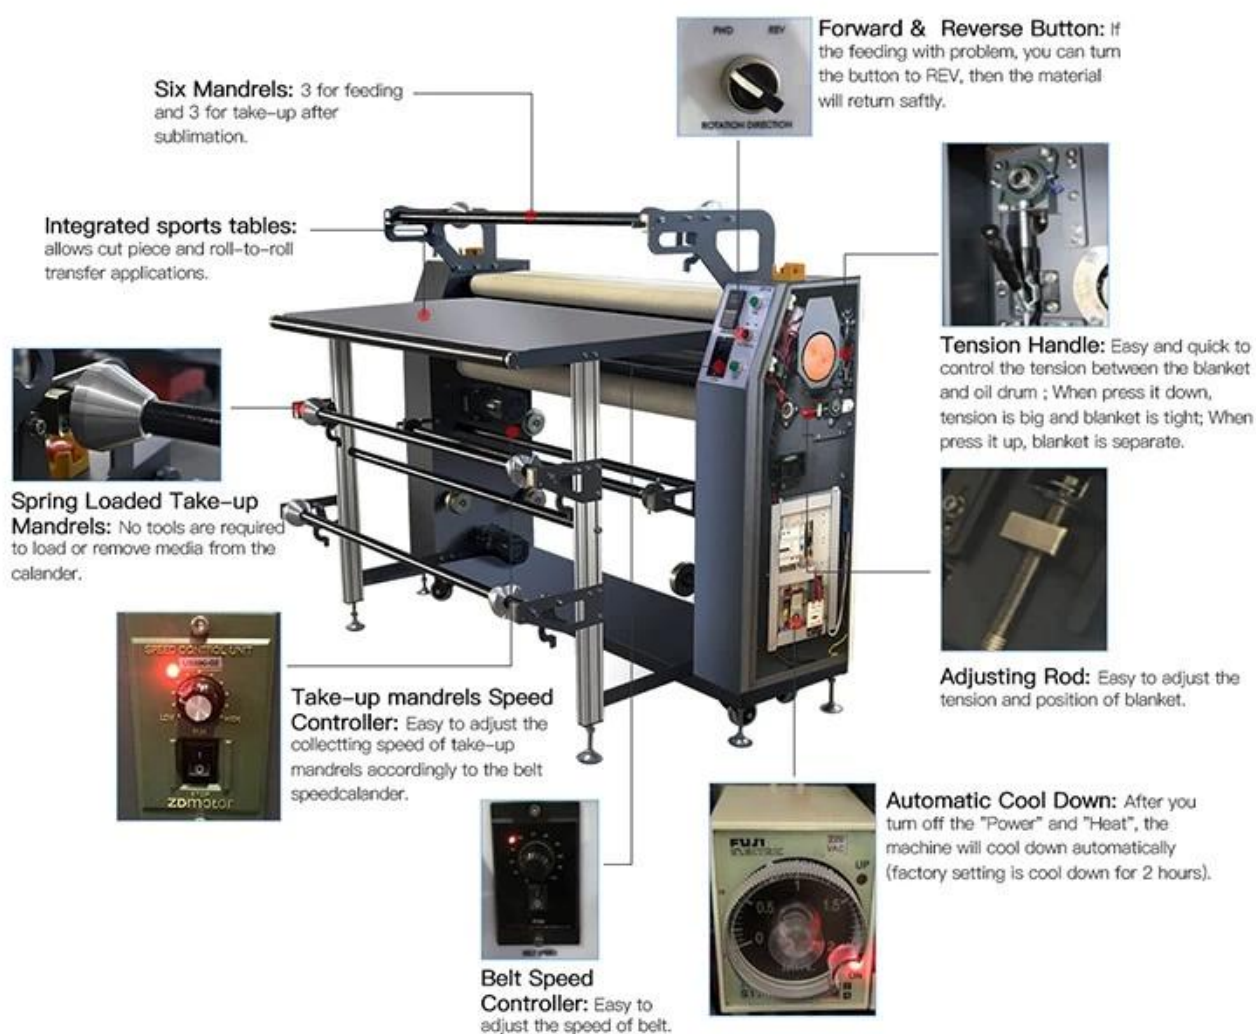

SPECIFICATIONS

MODEL NO.	MTX-44	MTX-68
MAX. WORKING WIDTH	44"(1200mm)	68"(1730mm)
DIA OF DRUM	Φ7.8"(200mm)	Φ9.8"(250mm)
MAX. TEMPERATURE	392°F(200°C)	392°F(200°C)
HEATING ELEMENTS	1	1
HEATING MEDIA	Thermal Oil	
CONTROLLER	Digital temperature & time control	
MAX. FEEDING SPEED	0-1100mm/min	0-1200mm/min
NUMBER OF MANDRELS INCLUDED	6 mandrels, 3 feed, 3 take-up	
MAX. MATERIAL ROLL DIMENSION	350mm	
MAX. ROLL WEIGHT	45kg	
VOLTAGE	220VAC 50HZ Single Phase	220VAC 50HZ Three Phase
CURRENT	27A	30A
POWER	6KW	11KW
NOISE LEVEL	30DB	30DB
NET/GROSS WEIGHT	450kg/	/
MACHINE SIZE	1630*976*1315mm	2300*1272*1505mm
PACKING SIZE	1830*1190*1630mm	2480*1440*1830mm

APPLICATION

01

Printed carpet

Sublimation transfer to roll carpet, rug, blanket, floor mat with brilliant colors.



02

Decorative cloth

It can be applied to curtain cloth, tablecloth, sofa cloth, and so on.



03

Fashion apparel

Sublimation printable cotton, linen, fibre, silk, and other fabrics of clothing, dress, suits, coat, accessories, etc.





04

Sportswear

Like football suit, basketball jersey, swimwear, etc.

05

Flags, banners

Transfer of flags and banners suitable for advertising industry



06

All kinds of cloth

Transfer printing of cloth of various sizes and materials, bright and saturated color, without distortion



Scan for more video details



Description

MTX MTX MTX

Feature

[illegible]

Specification

MTX-44	MTX-68
44"(1200mm)	68"(1730mm)
Φ7.8"(200mm)	Φ9.8"(250mm)
392°F(200°C)	392°F(200°C)
1□	3
□□□	
□□□&□□□□	
0-1100□□/□□	0-1200□□/□□
6 □□□□3 □□□□3 □□□	
350mm	
45□□	
220VAC 50HZ □□	220VAC 50HZ □□
27A	30A
6KW	11KW
30DB	30DB
450□□/	/
1630*976*1315mm	2300*1272*1505mm
1830*1190*1630mm	2480*1440*1830mm

Machine Warranty:

- * □□□□ 1 □
- * □□□□□□□□□□□□□□□□

Application

ROLL to ROLL

PIECE to ROLL

