

## Description

DEMOMON 45 40x50cm 2x40x50cm

DEMOMON 45 40x50cm 2x40x50cm



### Pneumatic Double Station Shuttle Heat Press with Floor Stand & Infrared Positioning Device

- Model No.: DEMON 45
- Two-station heat transfer
- Pneumatic drive, easy to operate, save time & effort
- Floor stand & universal wheels design to stop anywhere
- Infrared cross positioning devices to help pattern positioning


## Feature

DEMOMON 45

16 x 20 T

DEMOMON 45

# DEMON 45

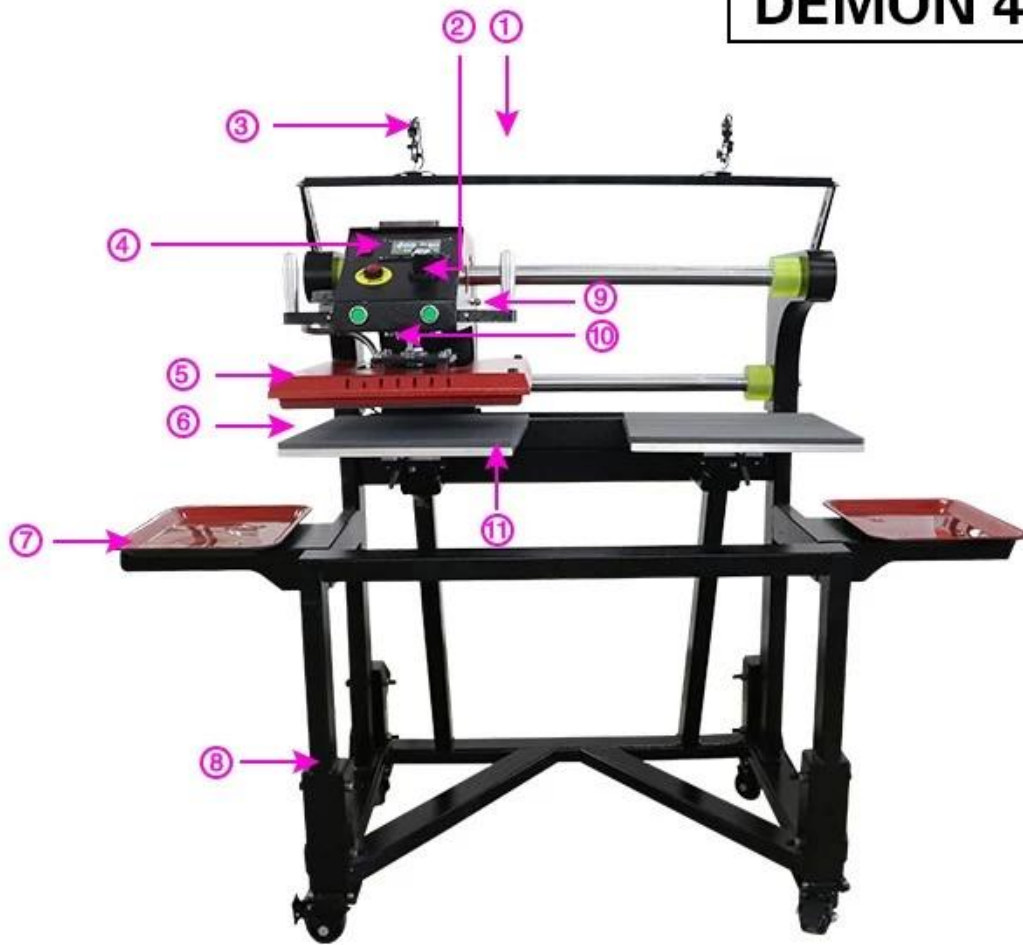

①	This machine is a shuttle type pneumatic two-station heat transfer printing machine, equipped with 2pcs of 40x50cm baseplates. Pneumatic drive, easy to operate, save time & effort, anyone can easily operate. The dual station design also improves production efficiency.
②	Pressure Adjustment: pressure adjustment device is installed on the operation panel, and the pressure can be adjusted by pulling up and twisting knob.
③	It is equipped with 2 infrared cross positioning devices: to help the pattern positioning and reduce the offset between the actual distance and the ideal distance.
④	GY06 digital time and temperature control
⑤	Anti – scalding cover: Safer to avoid burns.
⑥	Transfer thickness: up to 50mm
⑦	Carry 2 pallets (pallets can be put away) : place transfer materials or common tools
⑧	The machine is designed with a floor stand and four universal wheels: it can move around and stop anywhere you want. The floor stand of the machine is designed with an upper and lower adjustment space of 0–20cm, and the working table can be raised by another 10 or 20cm.
⑨	Upper and down speed adjustment knobs of the heating plate: two invisible speed adjustment knobs are set on the right side of the machine head: the upper knob can adjust the pressing speed of the heating plate, and the lower knob can adjust the rising speed of the heating plate.
⑩	Toggle switch: switch left, right hand operation machine transfer. Switch to the right, two hands operation machine transfer.
⑪	Baseplate: replaceable

## Specification

品牌	DEMON 45
产品系列	热转印机
规格	16 英寸 x 20 英寸 40 x 50 厘米
重量	11.5 公斤
控制	GY-06 数字控制
最大厚度	50 毫米
速度	4 档可调
电压	110V/220V
功率	1.6KW/1.8KW
电流	15A/20A
温度	50-60 度
时间	0-999 秒
温度范围	225°C
尺寸	115x115x165 毫米
重量	39.5 公斤

# GALLERY

---



# APPLICATION

