
Description



Feature

0000 000000 16 00 x 20 0000000000000000 T 0000000

NONDER DEMON 45 NORDONALDON DEMON 45 NORDON DE CONTRE DE

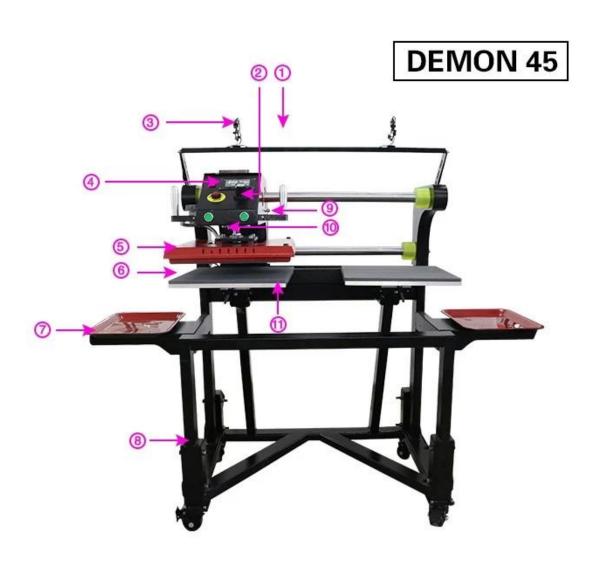

This machine is a shuttle type pneumatic two-station heat transfer printing machine, equipped 1 with 2pcs of 40x50cm baseplates. Pneumatic drive, easy to operate, save time & effort, anyone can easily operate. The dual station design also improves production efficiency. Pressure Adjustment: pressure adjustment device is installed on the operation panel, and the (2) pressure can be adjusted by pulling up and twisting knob. It is equipped with 2 infrared cross positioning devices: to help the pattern positioning and (3) reduce the offset between the actual distance and the ideal distance. 4 GY06 digital time and temperature control (5) Anti - scalding cover: Safer to avoid burns. 6 Transfer thickness: up to 50mm 7 Carry 2 pallets (pallets can be put away) : place transfer materials or common tools The machine is designed with a floor stand and four universal wheels: it can move around and stop anywhere you want. (8) The floor stand of the machine is designed with an upper and lower adjustment space of 0-20cm, and the working table can be raised by another 10 or 20cm. Upper and down speed adjustment knobs of the heating plate: two invisible speed adjustment (9) knobs are set on the right side of the machine head: the upper knob can adjust the pressing speed of the heating plate, and the lower knob can adjust the rising speed of the heating plate. (10)Toggle switch: switch left, right hand operation machine transfer. Switch to the right, two hands operation machine transfer.

Specification

(11)

Baseplate: replaceable

DEMON 45
16 x 20 40 x 50
GY-06 [][][][][][]
000 50 00
00000 4 0000
110V/220V
1.6KW/1.8KW
15A/20A
50-60
0-999 []
225°C
115x115x165[[
39500000

GALLERY













APPLICATION









