Description

[illegible]Microtec [illegible] MTX [illegible] [illegible] [illegible] MTX-44 [illegible] [illegible]

MTX-44 [illegible] 50% [illegible] Microtec 44"" Calender [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible] [illegible]MTX-44 [illegible]Microtec MTX-44 [illegible]

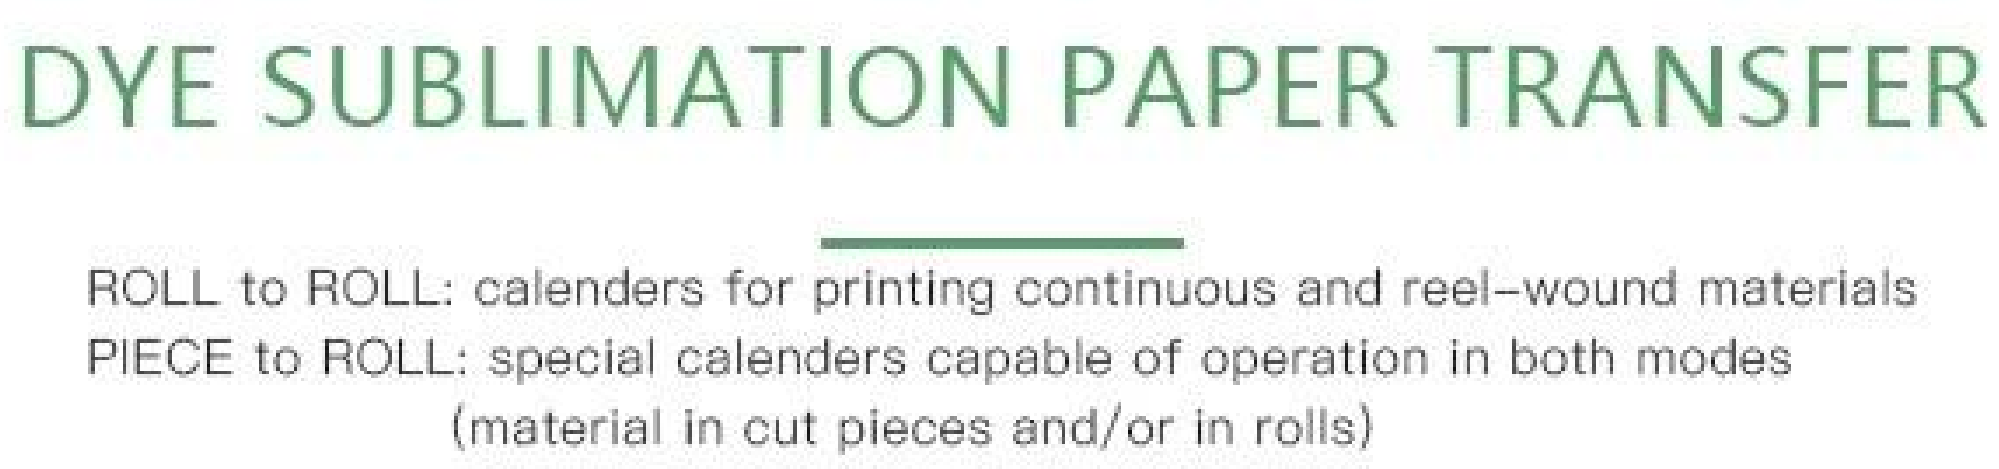

Feature

Microtec MTX □□ □□□□□

Microtec MTX □□□□□□□□□□:

□□□□□□□□□□□□□□: □□

6 □□□□□□□□: □□□□ 3 □□□□□□□□□□□□ 3 □□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□: □□□

□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□: □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□: □□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□: □□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□ □□□□ □□□□□□□: □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□

□□□□□□□□□: □□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□□ (□□□□□□□□□ 2 □□□□□□□□□)□

MTX-44(68)

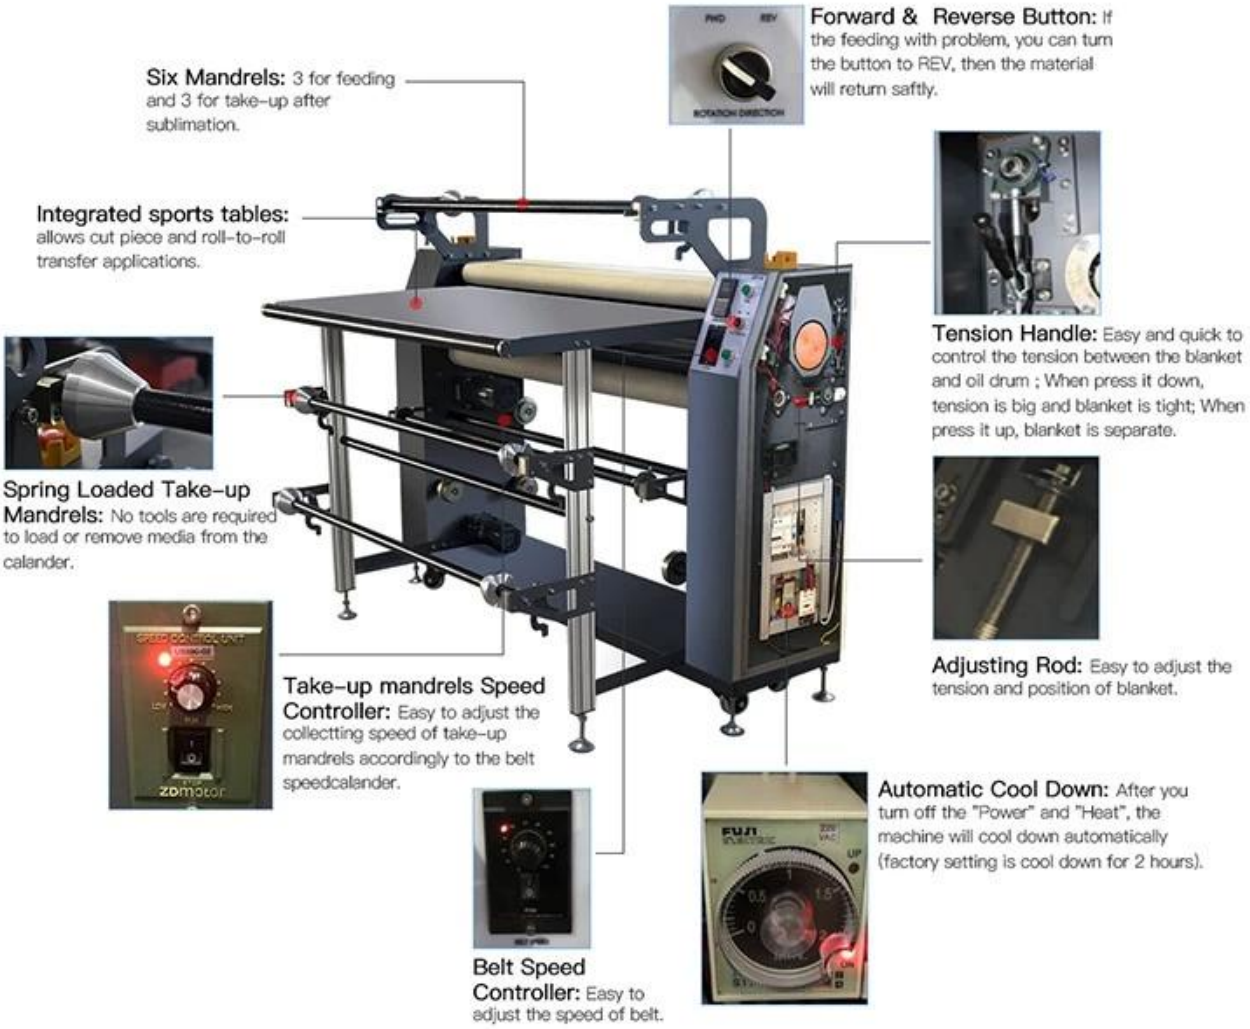

Specification

□□□□□□	MTX-44	MTX-68
□□□□□□	44□□□ (1200mm)	68□□□ (1730mm)
□□□□□□□	Φ7.8" (200mm)	Φ9.8" (250mm)
□□□□□	392℉ (200℃)	392℉ (200℃)
□□□	1	3
□□□	□□□□□□□ □□	
□□□□□□	□□□□□□□□□□□□	
□□□□□□□	0□1100mm/□	0□1200mm/□
□□□□□□□	□□□□□6□□□□3□□□□□□3□	
□□□□□□□□□□	350mm	
□□□□□□□□	45kg	
□□	AC220V 50HZ □□	220VAC 50HZ □□
□□	27A	30A
□	6KW	11KW
□□□□□	30DB	30DB

□□/□□□	450kg/	/
□□□□□□	163×98×132cm	230×130×151cm
□□□□□□□□	183×120×163cm	248×145×183cm

Application

MTX □□Microtec□MTX□□

□□□□□□□□□□:

- □□□□□□
- □□
- □□□□□□□□□□□□□□□□□□
- □□

MICROTEC

44" & 68" CALENDER ROLL TO ROLL