

## Description

ASTM-24 16"x24" (40x60cm) 2 station pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results.

16" x 24" pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results. PSI (Pounds per Square Inch) is a unit of pressure measurement.

ASTM-24 16"x24" (40x60cm) 2 station pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results.



**ASTM-24** 16"x24" (40x60cm) 2 station pneumatic heat press machine.

Capacity: ASTM-24 2 station pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results.

Pressure: 16" x 24" pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results.

Temperature: 16" x 24" pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results.


Capacity: ASTM-24 2 station pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results.

Pressure: 16" x 24" pneumatic heat press machine. It is designed for professional use in garment manufacturing, providing consistent heat and pressure for high-quality results.

## Feature

# 1 Two Working Tables

Dual platform use, more convenient.

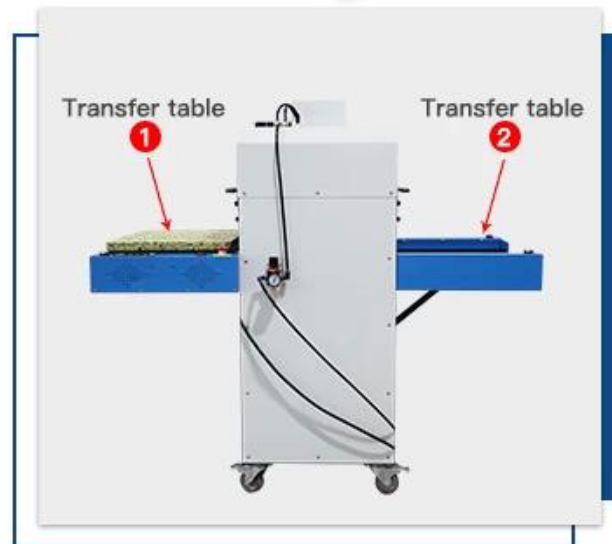

# 2 Gravity Die Casting Heating Plate

High quality heat element, which makes the heat distribution more even and stable.

# 3 GY-06 Digital Controller

Accurate temperature display & control, auto time counting, per-alarm, and temperature collation.





## 4 Pneumatic Mode

Pneumatic Auto Model, High Pressure.

## 5 Safe Emergency Button

When the machine is operating, you can press this button to protect the user's personal safety in an emergency.



### Specification

Model	ASTM-24
Dimensions	1600mm×2400mm(40×60cm)
Material	Stainless Steel
Pressure	GY-06 0-6bar
Flow Rate	50L/min
Power	120V/220V
Capacity	1600W/1800W
Temperature	0-999°C
Accuracy	±0.5%
Weight	148×93×148cm
	278kg



## Gallery

ASTM-24 直徑 1.5mm 圓形孔 5mm 間距 100mm 圓形孔 DTG 印刷 200% 放大 100% 縮小 100% 縮小

