

Microtec KN 95 30

30



Printable Side



Back Side

EASY TO USE

- ◆ Blank side is printable
- ◆ Yellow back with SP mark



**KNI-105g sublimation paper
has $\geq 98\%$ transfer rate**

Vibrant colors

Wide application

No pizza wheel marks



KN1-105



Others

□□□□□□

[Kni](#) 95


5

[1]□□□□□□□□□□□□□□□□□□□□□□

[2]

[3] [\[3\]](#)

Microporous structure make higher transfer rate and instant dry

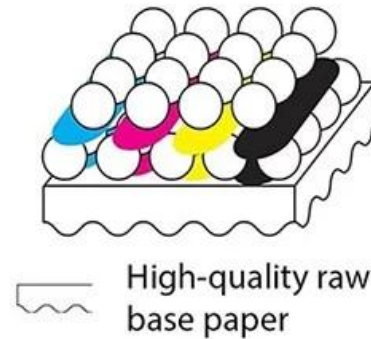

Polyester-coated hard substrates
Polyester-coated textiles



製品名	KNI-105
重量	105g
サイズ	A4/A3
厚さ	95μm
色	白/黒/グレー/40色
印刷方式	sp
印刷速度	100枚/分
価格	30枚/箱A4用紙

The transfer process of Sublimation paper



Work with sublimation ink and heat press



Inkjet Printer
Sublimation Ink



Transfer with
Heat Press



Light colored material
with cotton content < 30%



Not work with regular ink and iron



Regular Ink



Transfer with Iron



NO result

Printing Instructions

NOTE: For best results we recommend to use a transfer temperature of 205°C. Using this temperature will enhance the transfer quality.e.g.color densities and line sharpness.

Suggested Transfer Instruction

SUBSTRATES	TEMPERATURE	TIME	PRESSURE
Metal Plates	401F (205°C)	150±30 sec	Medium
Fiberglas	401F (205°C)	60±15 sec	Medium
Ceramic mugs	401F (205°C)	3±1 min	Heavy
Ceramic Tiles	401F (205°C)	6±1 min	Light-Medium
Plaques	401F (205°C)	60±15 sec	Medium
Hard boards	401F (205°C)	100±15 sec	Medium
Glass	401F (205°C)	5±1 min	Medium-Heavy
Mouse pads	401F (205°C)	60±15 sec	Medium
Textile applications	401F (205°C)	25-40sec	Medium

Please contact your substrate supplier for additional information



30

Widely used in life

APPLY FOR COATED
HARD SUBSTRATES



APPLY FOR WHITE OR
LIGHT COLORED FABRIC

