


Description

XSTM-98 [Pneumatic](#) [Screw](#) [Microtec](#) [1.5 m x 2.5 m \(59 x 98\)](#) [3](#)

XSTM [1](#) [2](#) [1](#) [2](#) [1](#) [2](#) [1](#) [2](#)

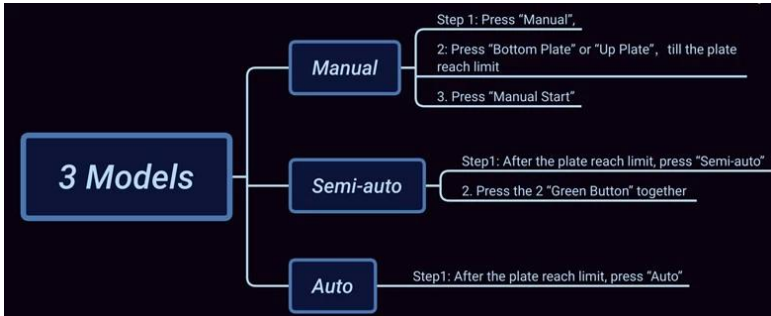

XSTM 1.5x2.5m 氣壓式熱壓機

1) 氣壓式熱壓機 1.5x2.5m 氣壓式熱壓機 1.5x2.5m 氣壓式熱壓機

YouTube 影片連結: <https://www.youtube.com/watch?v=GbgDx8NONIA>
<https://www.youtube.com/watch?v=2G-kFbYw4g>

2) PLC 數位化升級: <https://www.heatpress.cn/news/Upgraded-PLC-digital-touch-screen.html>

PLC 數位化升級 氣壓式熱壓機

UPGRADED PLC DIGITAL TOUCH SCREEN

Used for XSTM series Pneumatic Heat Press

- Easy maintenance
- Simple operation
- Temp difference within $\pm 5^{\circ}\text{C}$
- Stable procedure ensure high efficiency

Feature




PLC 數位化升級: PLC 數位化升級 氣壓式熱壓機



NEW DEVELOPED PLUGGABLE HEAT ELEMENTS: 高品質、易於維護、熱壓機溫度均勻



XSTM-98 1.5x2.5m 氣壓式熱壓機



氣壓式熱壓機: 氣壓式熱壓機 氣壓式熱壓機




氣壓式熱壓機 氣壓式熱壓機

Specification

XXXXXXXXXX	XSTM-98
XXXXXX	0[999]
XXXXXX	225c
XXXXXX	21KW
XXXXXX	380V/□
XXXXXX	425×304×194cm
XXXXXX	XX
XXXXXX	355×221×223cm

Package

Strong woden case packing

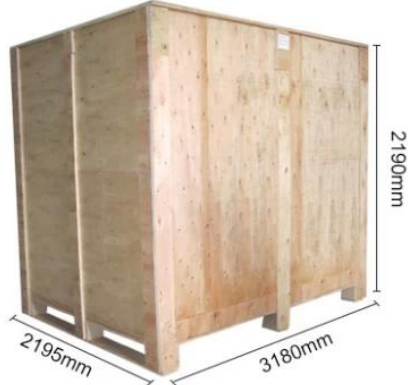

Gallery

Features



Full Size Transfer

Print size up to 150x250cm designed and built for full Transfer, even on the collar with fold.



High Pressure

With dual cylinders, the XSTM can provide high pressure for Maximum 45PSI.



Even Heat Distribution

The high quality heating plate of XSTM ensures exact temperature distribution over the whole heating Plate.



Automatical Mode

Heat press runs automatically with setting temperature and time



Easy Operation

Time and temperature are set within one digital controller panel, as well as the manual/ auto mode can be switched easily.



One Side Two Stations

With the 2 base plates, high production volumes can easily be achieved

Applications

