




# 1 Two Working Tables

Dual platform use, more convenient.

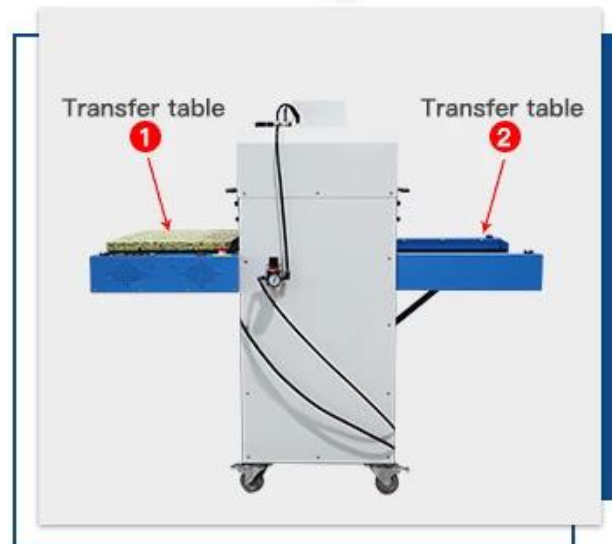

# 2 Gravity Die Casting Heating Plate

High quality heat element, which makes the heat distribution more even and stable.

# 3 GY-06 Digital Controller

Accurate temperature display & control, auto time counting, per-alarm, and temperature collation.





## 4 Pneumatic Mode

Pneumatic Auto Model, High Pressure.

## 5 Safe Emergency Button

When the machine is operating, you can press this button to protect the user's personal safety in an emergency.



### Specification

型番	ASTM-24
材質	アルミ、鋼
外形寸法	16"x24"(40x60cm)
重量	約10kg
圧力調整範囲	GY-06 0.1MPa ~ 0.7MPa
圧力調整精度	±50mmHg
圧力調整単位	0.1MPa
電源	120V/220V
消費電力	1600W/1800W
温度範囲	0~999℃
温度精度	225℃
温度調整精度	±0.5%
外形寸法	148x93x148cm
重量	278kg (約100kg)

# Gallery

ASTM-24 00, 00, 0000 0000 00, 000, 00, 00, 00 00 00000 000000. DTG, 00, 000 0000, 00, 0 00 00, 00 0 00 00 000 000000.

