

Description

[illegible]

□ □□□ □□□□ □□□□ □□ □□ □□ □□ □□ □□ □□ 60X80cm □ 60x100cm □ □□□ □□□□□□. □ □□, □□ □□ □□ □□ □□ □□ □□ □□□□□□.



Feature




圖 1: MAG-40 60x100cm 的磁鐵板，用於存放和整理文件，並可與磁鐵夾配合使用。



GY-06 鋼材 鋼材: 鋼材 鋼材. GY-06 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材. 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材 鋼材.



□□ □□ □□□: □□□□ □□□ □□□ □□ □□□□ □□ □□□□ □□□ □□□ □□□ □□□□.


[illegible]

Specification

型 号:	MAG-40
材 质	铸 铁, 不 锈 钢
尺 寸	24"x40"(60x100cm)
功 率	1.8KW/3.6KW
电 压	120V/220V
电 流	8A/16A
电 阻	30mm
电 阻	25mm
电 阻	120V/220V
电 阻	1.8KW/3.6KW
电 阻	0~999mm
电 阻	225℃
电 阻	MAG-40 121x112x97cm
电 阻	MAG-40 216kg

Application

MAG-40 是一款专为实验室设计的精密测量仪器。它采用高精度传感器和先进的信号处理技术，能够实现快速、准确的测量。该仪器具有体积小、重量轻、操作简便等优点，广泛应用于材料科学、化学、物理等领域。其测量范围广泛，能够满足不同实验需求。此外，该仪器还具有高稳定性、低噪声等特点，确保测量结果的准确性和可靠性。

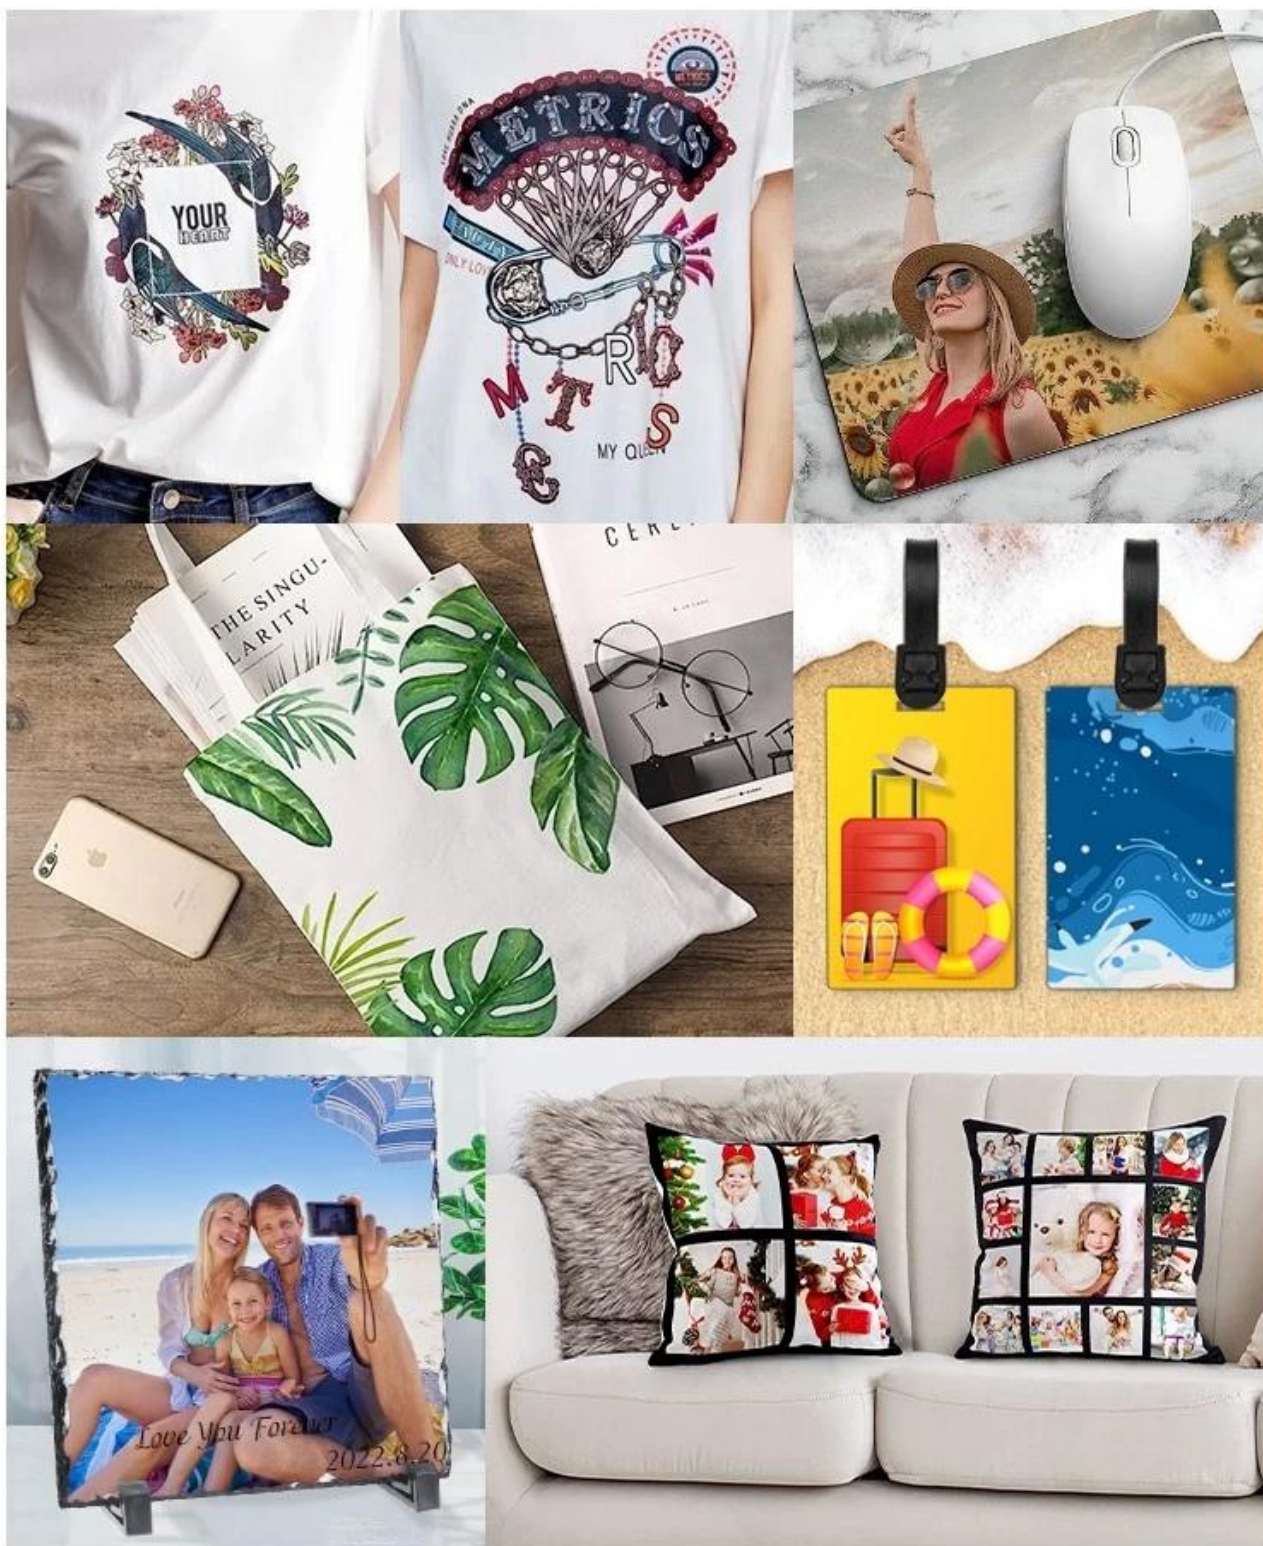

Heat Platen Test:

1. 将样品放入热压板中，在 150°C 下加热 5 分钟。2. 取出样品，检查是否有明显的变形或颜色变化。3. 记录测试结果。

Quality Control on Finished Machine:

1. 检查成品机器的外观是否有明显的缺陷。

2) 检查成品机器的性能是否符合要求。

3) 检查成品机器的使用寿命是否符合要求。

Package

□□ □□□ □□□□□□ □□□ □□□ □□□ □□□ □ □ □□ □□ □□ □□□ □□□□□.

Gallery

Features:

- > Auto Release Design
- > Large Format 60x100cm(24"x40")
- > GY-06 Digital Time & Temp. Control
- > Slide-Out & Exchangeable Under Plate



Anti-Scald Protect Cover



GY-06 Digital Controller



Emergency Button



Transit Hanger

Specifications:

Model No	MAG-40
Platen Size	24"x40"/60x100cm
Voltage	120V/ 220V
Power	1800W/ 3600W
Printable Articles	Up to 15mm Thickness
Opening Angle	25 degrees
Time Range	0-999 sec.
Maximum Temp	225 °C
Temperature Accuracy	±0.5%
Packing Size	47"x43"x37"/120x110x95cm

A digital level with a large, flat, rectangular base. A vertical scale is attached to the center of the base, featuring a digital display and a sliding weight. The device is used for measuring the flatness or levelness of a surface.



SENKO Auto Open Series with Different Sizes Heat Platen



SENKO 30
(20"x32"/50X80cm)



SENK 20A
(16"x20"/40X50cm)

[illegible]

- * 00 0 0000 0000 00 00 00 00 00.
- * 20 00
- * 00 0 0000 00 50 00.
- * 0000 00 0000 50000.